




SENSOR DE MOVIMIENTO

Modelo Model	PAS184RS	PAS184RSE
Sensor Sensor	Sí / Yes (IR)	Sí / Yes (IR)
Emergencia Emergency	No	Sí / Yes
Ajustes Settings	Tiempo, Luminosidad Time, Light	
Potencia Power	15W	15W
Potencia emergencia Emergency power	-	1.2W
Tensión de entrada Input voltage	220V-240V AC	220V-240V AC
Frecuencia Frequency	50Hz-60Hz	50Hz-60Hz
Temperatura de color Color temperature	4500K□	4500K□
Flujo lumínico Lumen	1540Lm	1540Lm
Flujo lumínico / Emergencia Lumen / Emergency	-	65Lm
Aro Ring	Blanco / White	Blanco / White
Difusor Diffuser	Opal	Opal
Diámetro Diameter	250mm	250mm
Grosor Thickness	52mm	52mm
IP	44	44



Sensor IR configurable de alta sensibilidad.

Configurable IR sensor high sensitivity.



APLIQUE CON SENSOR IR


UNA INVERSIÓN SEGURA.

El aplique PAS184 se encenderá única y exclusivamente cuando sea necesario, sin malgastar ni un vatio de energía gracias a su sensor integrado. Incluyendo situaciones de emergencia: el modelo RSE incorpora una batería interna que garantiza mantener la iluminación de seguridad aun con un corte de fluido eléctrico.

A SAFE INVESTMENT.

PAS184 wall light will only be switched on when necessary, without wasting a watt of energy thanks to its integrated IR sensor. Including emergency situations: RSE model is assembled with an internal battery that guarantees to maintain the safety light even when an electricity cut occurs.

PAS184RS
PAS184RSE

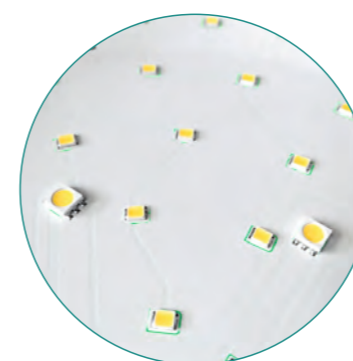

RSE
Con emergencia incorporada



Videos demostrativos:
www.pritec.com/videos

